


APPROACH END-BRIDGE OR CONCRETE BARRIER

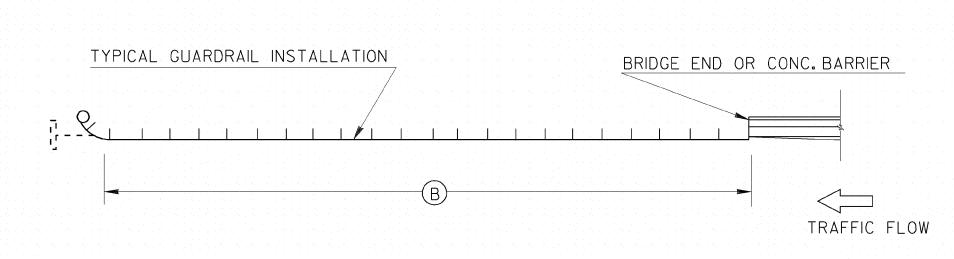

TRAILING END-BRIDGE OR CONCRETE BARRIER

SPACING OF REFLECTORIZED WASHERS

(A) AT ANCHORAGES: -TWO (2) REFLECTORIZES WASHERS ARE REQUIRED ON THE RAIL UNDER SPLICE BOLTS AS DIRECTED BY THE ENGINEER FOR ELLIPTICALLY FLARED ANCHORAGES WITH ROUNDED END PIECES;

-NO REFLECTORIZED WASHERS WILL BE USED FOR TANGENTIALLY ALIGNED OR STRAIGHT TAPERED ANCHORAGE WITH EXTRUDER OR IMPACT HEADS

-AT 75 FT. SPACINGS FOR INTERMEDIATE SECTIONS;

-THREE WASHERS AT 6'-3" SPACING AT CONNECTIONS TO CONCRETE FACE ON THE APPROACH END;


(D) -AT 12'-6" SPACINGS AROUND RADII TURNS.

NOSE STRIPING DETAILS

(REQUIRED WITH ANCHORAGE WITH EXTRUDER OR

STATE | PROJECT NUMBER

GA. CSNHS-0008-00(415)01 385 472

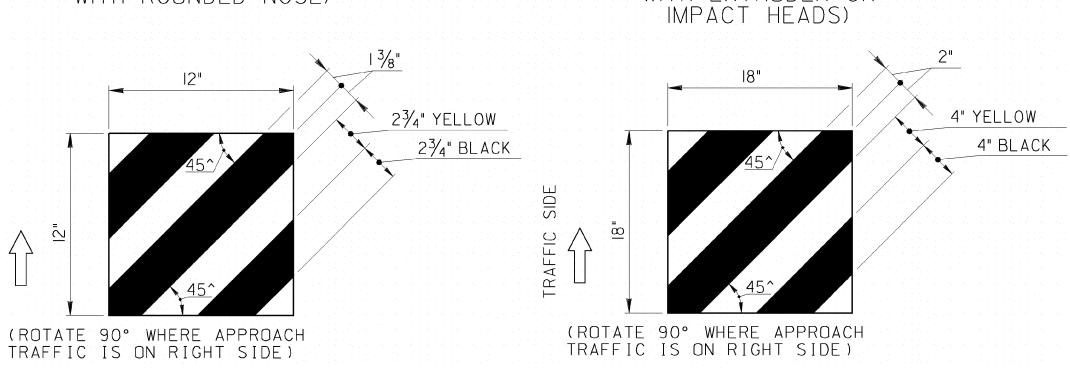

BLACK GLOSS DURABLE INK PRINTED ON TYPE IX REFLECTIVE SHEETING (SEE CURRENT SEC. 913 AND 917)


(REQUIRED FOR ANCHORAGE

WITH ROUNDED NOSE)

## GENERAL NOTES:

- I-SPECIFICATIONS: GEORGIA STANDARD, CURRENT EDITION, & SUPPLEMENTS THERETO.
- 2-SEE SEPARATE STANDARDS FOR DETAILS OF GUARDRAIL INSTALLATIONS, CONNECTING HARDWARE, AND ANCHORAGES.
- 3-PAYMENT FOR GUARDRAIL AND ANCHORAGES INCLUDES ALL REFLECTORIZED WASHERS AND NOSE STRIPING REQUIRED.
- 4-ADJUSTMENTS OF SPACINGS AND/OR REQUIREMENTS FOR REFLECTIVE WASHERS MAY BE DIRECTED BY THE ENGINEER TO SUIT INDIVIDUAL LOCATIONS.
- 5-WHERE DOUBLE FACED GUARDRAIL IS LOCATED ON THE INSIDE SHOULDER OF MEDIANS, REFLECTORIZED WASHERS SHALL BE REQUIRED ONLY ON THE SIDE WHICH IS NEAREST TO TRAFFIC, UNLESS SPECIFIED OTHERWISE.

## DEPARTMENT OF TRANSPORTATION STATE OF GEORGIA STANDARD REFLECTORIZED GUARDRAIL WASHERS AND EV. REFLECT REFLEC. S ADD NOSE REV ANCHORAGE NOSE STRIPING NO SCALE REV. & REDR. APRIL, 1999 NUMBER (SUBMITTED) STATE ROAD & AIRPORT DESIGN ENGINEER DRWN.\_ CHK.\_ 4360

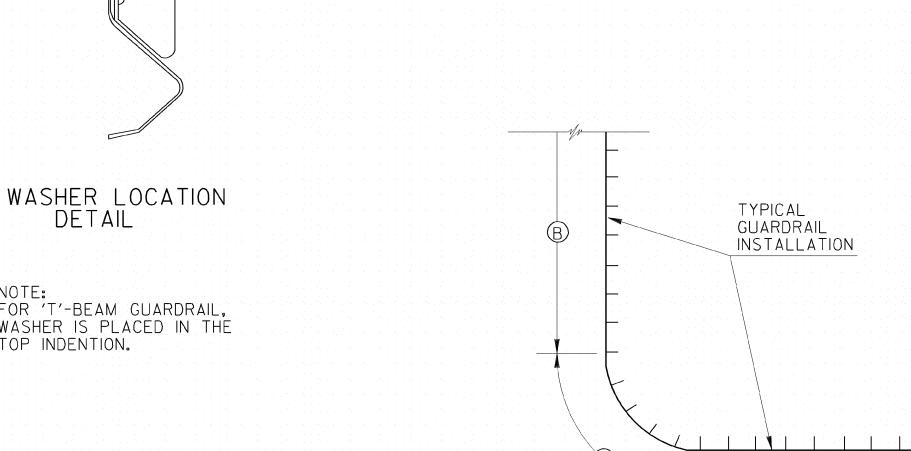

REFLECTORIZED WASHER DETAILS

23/4"

DIRECTION OF TRAFFIC

BY THE DEPT. OF TRANSPORTATION LABORATORY.

36^(+-4^)

COLORS: YELLOW IN MEDIANS AND

REFLECTORIZED

BUTTONHEAD BOLT

WASHER

MATERIALS: ALUMINUM (ASTM B 209 ALLOY 5052 H-32 OR 12 GA. STEEL (ASTM A 526 GALV. M-III) WITH REFLECTIVE SHEETING, AS APROVED

WHITE ON OUTSIDE SHOULDERS

